



## Yuasa Technisches Datenblatt

### Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batterien

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	110Ah
Kaltstartstrom (A) EN1	950A

#### Abmessungen

Länge	393mm
Breite	175mm
Höhe	190mm



#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	26.3kg
--	--------

#### Gehäuseeigenschaften

Gehäusotyp	L6 DIN
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	6A
Performance Marking	W4-C2-V3-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post

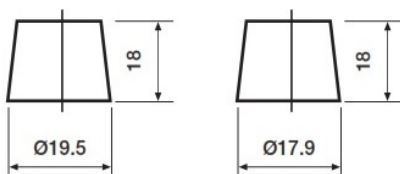

Positive Terminal

Negative Terminal

#### Zellenanordnung

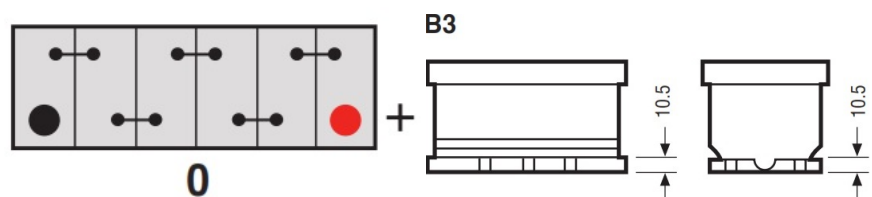

#### Batteriehälter

Datenblatt erstellt am 15/10/2022 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	110Ah
Cold Cranking Amps (EN1)	950A

#### Dimensions

Length	393mm
Width	175mm
Height	190mm



#### Weights & Measures

Mean Weight with Acid	26.3kg
-----------------------	--------

#### Container Features

Case Type	L6 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	6A
Performance Marking	W4-C2-V3-E1

#### Terminal Type

##### T1


Standard DIN Post

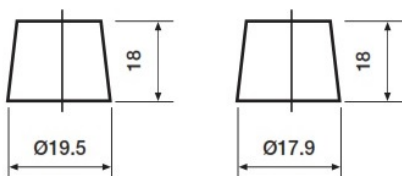


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

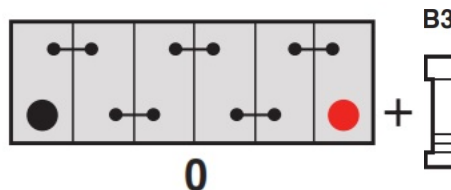

#### Battery Hold-down

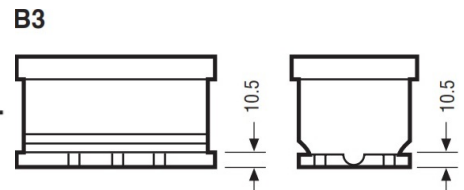

Data Sheet generated on 15/10/2022 - E&OE