



Yuasa Technisches Datenblatt

Yuasa YBX3019 - YBX3000 SMF Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
 Kapazität 20 Std (vorgegeben) 95Ah
 Kaltstartstrom (A) EN1 850A

Abmessungen

Länge 353mm
 Breite 175mm
 Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 24kg



Gehäuseeigenschaften

Gehäusotyp L5 DIN
 Anschlusspol Typ T1
 Batteriehalter B3
 Ladezustandsanzeige ✓
 Tragegriffe ✓
 Entgasung ✓
 Deckeltyp SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz ✓
 Technologie Ca/Ca
 Adskiller PE
 VDA Überschlagentest ✓
 Empfohlener Ladestrom 6A
 Performance Marking W3-C2-V2-E1


Anschlusspol Typ

T1

Standard DIN Post

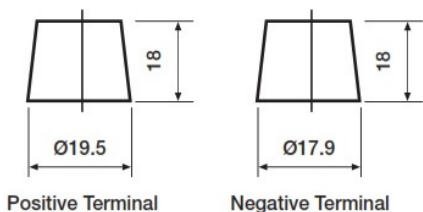

Zellenanordnung

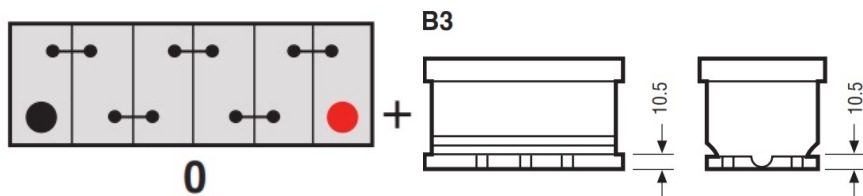

Batteriehalter

Datenblatt erstellt am 15/12/2022 - E&EO





Yuasa Technical Data Sheet

Yuasa YBX3019 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	95Ah
Cold Cranking Amps (EN1)	850A

Dimensions

Length	353mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	24kg
-----------------------	------



Container Features

Case Type	L5 DIN
Terminal Type	T1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	6A
	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

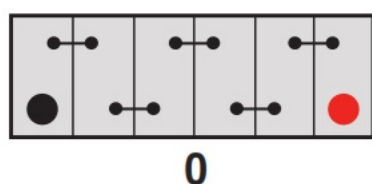

0

Battery Hold-down

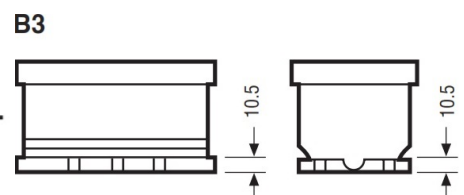

B3

Data Sheet generated on 15/12/2022 - E&OE