



Yuasa Technisches Datenblatt

Yuasa YBX5056 - YBX5000 Silver High Performance SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	40Ah
Kaltstartstrom (A) EN1	360A

Abmessungen

Länge	187mm
Breite	137mm
Höhe	225mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	9.4kg
--	-------



Gehäuseeigenschaften

Gehäusotyp	JIS B19 + B1
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	3A
Performance Marking	W4-C2-V3-E1


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3




Zellenanordnung

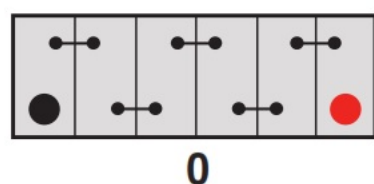

Batteriehälter

B1

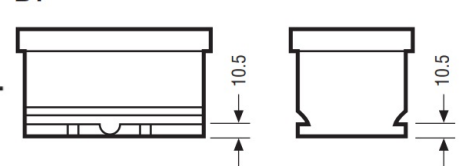

Datenblatt erstellt am 15/10/2022 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5056 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	360A

Dimensions

Length	187mm
Width	137mm
Height	225mm

Weights & Measures

Mean Weight with Acid	9.4kg
-----------------------	-------



Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	3A
	W4-C2-V3-E1


Terminal Type

T1/T3


Standard DIN Post




Remove T1 adapter for T3



Cell Assembly Layout

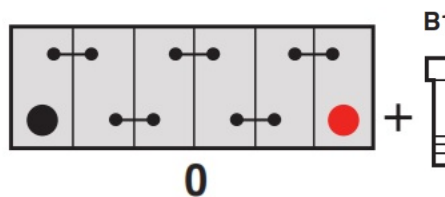

Battery Hold-down

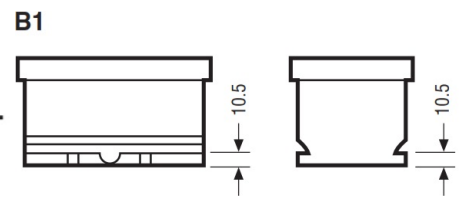

Data Sheet generated on 15/10/2022 - E&OE