



## Yuasa Technisches Datenblatt

### Yuasa YBX7115 - YBX7000 EFB Start Stop Plus Batterien

#### Leistung

Spannung 12V  
 Kapazität 20 Std (vorgegeben) 85Ah  
 Kaltstartstrom (A) EN1 760A

#### Abmessungen

Länge 317mm  
 Breite 175mm  
 Höhe 190mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 21.2kg



#### Gehäuseeigenschaften

Gehäusotyp L4 DIN EFB  
 Batteriehalter B3  
 Ladezustandsanzeige ✓  
 Tragegriffe ✓  
 Entgasung ✓  
 Deckeltyp SMF doppelwandige Deckelkonstruktion


#### Technologie

Flammschutz ✓  
 Technologie Ca/Ca  
 Adskiller PE  
 VDA Überschlagentest ✓  
 Empfohlener Ladestrom 5A  
 Performance Marking W3-C2-V3-M1

#### Anschlusspol Typ

##### T1


Standard DIN Post

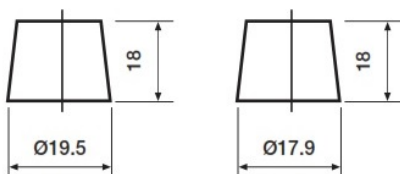

Positive Terminal

Negative Terminal


#### Zellenanordnung

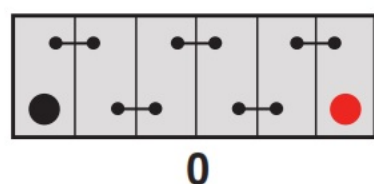

0

#### Batteriehalter

##### B3

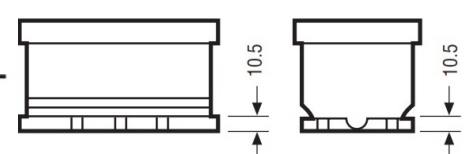

Datenblatt erstellt am 14/10/2022 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX7115 - YBX7000 EFB Start Stop Plus Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 85Ah |
| Cold Cranking Amps (EN1) | 760A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 317mm |
| Width  | 175mm |
| Height | 190mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 21.2kg |
|-----------------------|--------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | L4 DIN EFB     |
| Hold Down                 | B3             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |


#### Technology

|                           |             |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓           |
| Separator                 | Ca/Ca       |
| VDA Roll Over Test        | PE          |
| Recommended Charge Rate   | ✓           |
| Performance Marking       | 5A          |
|                           | W3-C2-V3-M1 |

#### Terminal Type

##### T1


Standard DIN Post

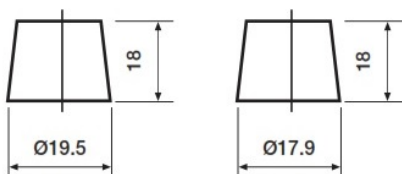


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

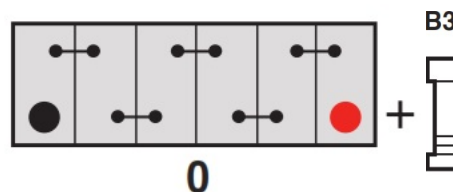

#### Battery Hold-down

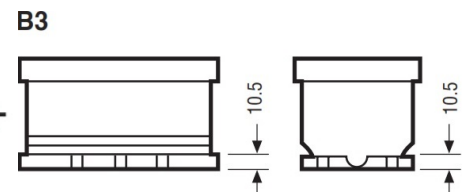

Data Sheet generated on 14/10/2022 - E&OE