



## Yuasa Technisches Datenblatt

### Yuasa YBX3078 - YBX3000 SMF Batterien

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	62Ah
Kaltstartstrom (A) EN1	550A

#### Abmessungen

Länge	243mm
Breite	175mm
Höhe	190mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	16kg
--	------



#### Gehäuseeigenschaften

Gehäusotyp	L2 DIN
Zellenanordnung	1
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion

#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	4A
Performance Marking	W3-C2-V2-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post



Positive Terminal


Negative Terminal

#### Zellenanordnung

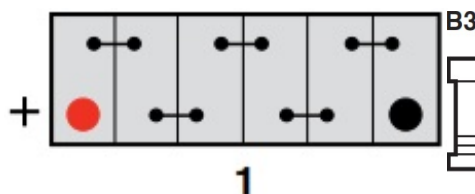

1

#### Batteriehälter

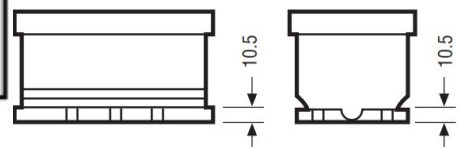

Datenblatt erstellt am 13/12/2022 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3078 - YBX3000 SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	62Ah
Cold Cranking Amps (EN1)	550A

#### Dimensions

Length	243mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	16kg
-----------------------	------



#### Container Features

Case Type	L2 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W3-C2-V2-E1


#### Terminal Type

##### T1

Standard DIN Post




Positive Terminal




Negative Terminal

#### Cell Assembly Layout

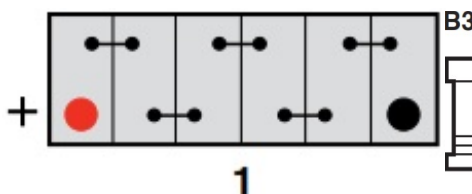

#### Battery Hold-down

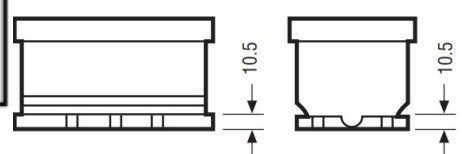

Data Sheet generated on 13/12/2022 - E&OE